



TR 575 & 750 SPRAYMASTER™ WITH PRO-AIR SYSTEM

TRAILER MOUNTED SEALCOAT SPRAY SYSTEM APPLICATORS

DESIGNED TO MIX AND APPLY PAVEMENT SEALER WITH OR WITHOUT SAND

TR 575 & 750 Features:

- Dependable, low-maintenance air-driven dual diaphragm pump. Shifts to neutral automatically when wand or spray bar is shut off. Sprays sand-filled pavement sealers.
- 575 or 750-gallon tank with hydraulically controlled, full-sweep agitator with rubber wiper blades
- 75-foot hose and spray wand - Spray bar is optional
- Two 6,000 lb. axles
- Running lights and brake lights
- Safety break-away braking system
- One-gallon basket strainer



PRODUCT #	DESCRIPTION	WEIGHT
E1120	TR 575 Pro-Air	3,100 lbs.
E1120XD	TR 575 Pro-Air Extended Deck	3,900 lbs.
E1132	TR 750 Pro-Air	3,900 lbs.
E1132XD	TR 750 Pro-Air Extended Deck	4,200 lbs.

Optional Features:

P50246M	Manual spray bar [includes seat and mounting components]	
P50247L	Lever - Manual spray bar	
P50330	50 Gallon water tank, mounting kit and pump	
P50331	Hydraulically driven SandPumper II material pump system	
P50246D	Hydraulically operated spray bar [SandPumper II only]	
P50280B	Water Cooler	
P50281B	Night Work Lights	
P50336	Electric Hose Reel: returns spray hose automatically	
P50337	Hand Operated Hose Reel	
T1145	Brush Water Box 40"	
P50405	2" Air Diaphragm Pump	
E9000	Blocking / Bracing Charge (if required)	400 lbs.

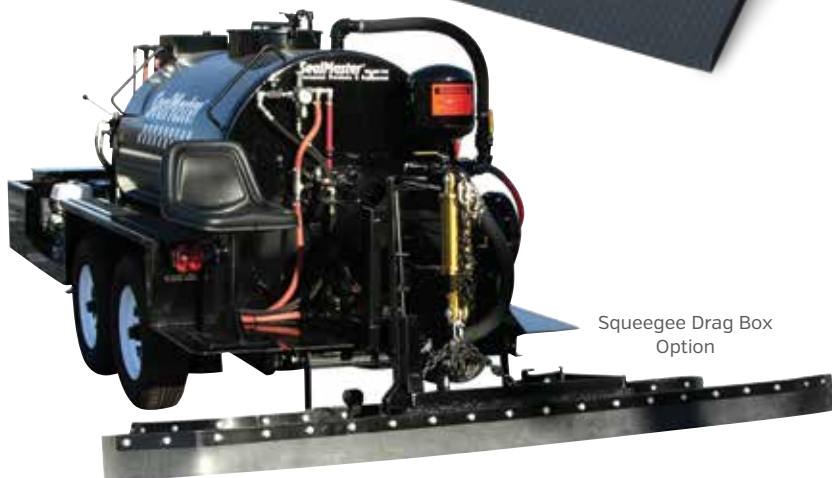
TR 575 SPECIFICATIONS:

Height	73"
Width	75"
Length with Spray Bar	18'
Length with Storage Deck	20'
Spray Bar Width	88"
Axles	2 - 6,000 lbs.
Tongue Weight Empty	380 lbs.
Engine	GX390 Honda
Material Pump:	
Type	Dual Diaphragm
Inlet / Outlet	1 1/2"
Air Compressor:	
Engine	GX390 Honda
SCFM	30.0

TR 750 SPECIFICATIONS:

Height	81"
Width	75"
Length with Spray Bar	18'
Length with Storage Deck	20'
Spray Bar Width	88"
Axles	2 - 6,000 lbs.
Tongue Weight Empty	390 lbs.
Engine	GX390 Honda
Material Pump:	
Type	Dual Diaphragm
Inlet / Outlet	1 1/2"
Air Compressor:	
Engine	GX390 Honda
SCFM	30.0

* Call for pricing

Storage Deck
ShownSqueegee Drag Box
OptionSpray Bar and Seat
Option

OPTIONAL FEATURES:

- Storage Deck
- Hand Operated Hose Reel
- 50-Gallon Water Tank
- Brush Water Box
- Manually Operated Spray Bar
- Hydraulically Operated Spray Bar [SandPumper II System Only]
- SandPumper II Hydraulically Driven Material Pump System
- Work Lights
- Squeegee Drag Box [Contact SealMaster for More Information]
- Water Cooler
- Maxi Air System

STANDARD
FEATURES:GX390
Honda EngineDual Diaphragm
Material PumpOne Gallon Basket
StrainerSafety Break-Away
Braking SystemDirect-Drive
FWD/REV Agitation